


G308/G308-Pro Data Sheet

G308 / G308-Pro

Compact 2-way
Full Range System

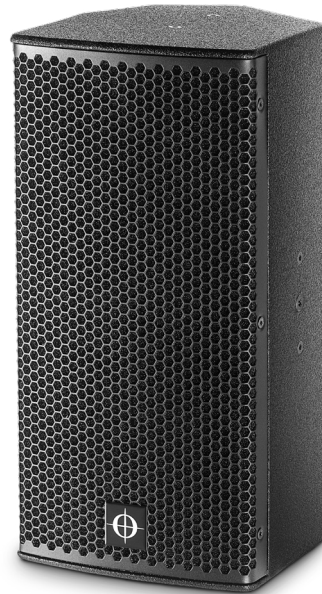

CODA's G-Series boxes are made with versatility in mind: full range systems that incorporate top end drivers; as a result, they're suitable for a wide range of applications.

The G300 Series includes the G308/G308-Pro and the G15-SUB, and as is always the case

with CODA, it all starts with the drivers: it's a compact, smart 2-way system with wide dispersion, incorporating top quality patented annular HF drivers with a 1.5-inch voice coil, and ultra-low distortion neodymium woofers with a 2-inch voice coil and double demodulation rings.

The G308/G308-Pro boasts a power handling of 220 W, has an 8-inch cone driver, and 1-inch compression driver – but these are no ordinary compression drivers, of course: the HF drivers contain CODA's unique CuCup technology, which dramatically reduces intermodulation distortion, and in turn, deliver the most pristine and transparent audio.

It's also simple to mount them on walls or ceilings thanks to its M6 flying points for optional U-brackets, making it a no-brainer for any touring or install application: it's a great choice for small clubs, bands, corporate events – even as a 5.1 surround solution or a dedicated stage monitor. The sky really is the limit.


Low end reinforcement comes courtesy of the compact G15-SUB and its 15-inch neodymium ultra-low distortion woofer. It packs a serious punch as 1200W, and is the perfect partner to the G308/G308-Pro.

G308/G308-Pro Features

- ⊕ Extreme compact multidesign enclosure
- ⊕ Wide coverage angles
- ⊕ 1" patented compression driver
- ⊕ Multiple fly-points for easy hanging
- ⊕ 8 Ohm nominal impedance
- ⊕ Extended accessories range for both touring and installation
- ⊕ G308-Pro features integrated flange adapter







G308/G308-Pro Data Sheet

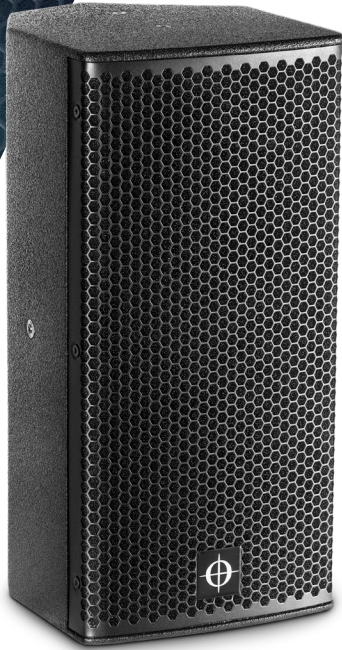

Product type:	2-way full range system, multidesign enclosure
Dimensions (WxHxD):	230 x 471 x 260 mm / 9.05 x 18.54 x 10.24"
Dimensions including hardware (WxHxD):	N/A
Net weight:	9.5 kg / 20.94 lbs
Frequency response:	60 Hz – 30 kHz (-6 dB)
Power handling AES / peak (passive):	220 W
- Low AES / peak:	N/A
- Mid / High AES / peak:	N/A
Max. peak SPL (with LINUS10):*	124 dB
Dispersion horizontal:	90° conical
Dispersion vertical:	N/A
Components Low frequency:	8" ultra low distortion cone driver, 2" (51 mm) voice coil
Components Mid/High frequency:	1" compression driver, 1.5" (38 mm) voice coil
Crossover point:	1900 Hz
Input connectors:	2 x Neutrik™ NL4MP
Nominal impedance LF / MF+HF:	8 Ω (+1/-1)
Enclosure material:	Birch plywood
Suspension:	G308-Pro: M6 and M8 threaded points and flange adapter** G308: M6 threaded points

*Measured with pink noise 6 dB crest factor. Half-space loading.

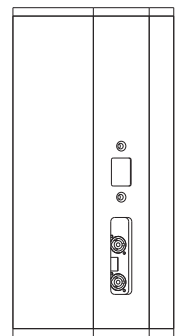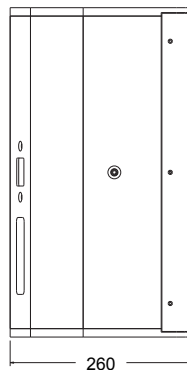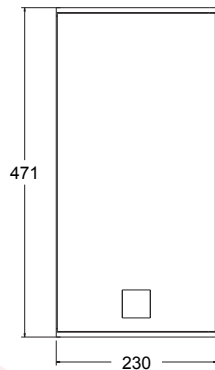

Other G-Series Related Products



G15-SUB

Compact High-Output Subwoofer



G18-SUB

Extended Low Frequency Subwoofer



LINUS5-C / LINUS10-C

4-Channel Loudspeaker Management Amplifiers

CODA AUDIO GmbH

Boulevard der EU 6, 30539 Hannover, Expo Park, Germany
E-Mail: contact@codaaudio.com Website: www.codaaudio.com

CODA
CODA AUDIO

